
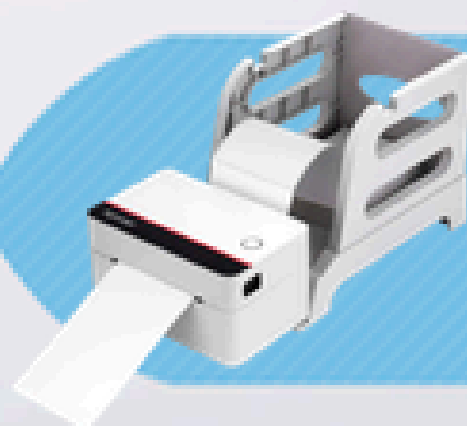


XP-D362B

Mini Label Printer

- Printing speed up to 152 mm (6 ") / s
- 8MB Flash Memory, 8MB SDRAM / MicroSD
- Employs a user-friendly double-wall clamshell design
- Auto calibration of media
- Head-up sensor / Gap sensor / Black mark sensor / Paper exit sensor

Xprinter®



XP-D362B

Thermal Barcode Printer



Model	XP-D362B
Resolution	203 DPI
Printing method	Direct Thermal
Print speed	152 mm (6 ") / s
Max print width	80mm (3.14")
Media	
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	25.4 mm ~ 80 mm
Media thickness	0.06 mm ~0.25 mm
Label length	10 ~ 1778 mm (0.39" ~ 70")
Label roll capacity	External paper roll holder
Performance Features	
Processor	32-bit CPU
Memory	8MB Flash Memory / 8MB SDRAM
Interface	USB (Optional:Bluetooth/WiFi/Cloud WiFi)
Sensors	Gap sensor Cover opening sensor Black mark sensor Paper exit sensor
Fonts / Graphics / Symbolologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software
1D barcode	Code 39, Code 93, Code 128UCC, Code 128 , subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 205) digits add-on, MSI, PLESSEY, POSTNET, China POST
2D barcode	PDF-417, Maxicode, DataMatrix, QR code
Rotation	0° / 90° / 180° / 270°
Emulation	TSPL / EPL / ZPL / DPL
Physical Features	
Dimension	150 * 86.5 * 95mm (D*W*H)
Weight	0.65 kg
Reliability	
Print head life	30 km
Software	
Driver	Windows / Linux / Mac
SDK	Windows / Android / IOS
Power supply	
Input	AC 100-240V, 50-60Hz
Output	DC 24V, 2.5A
Options	
Factory Options	① WIFI ② Bluetooth
Dealer Options	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder ③ Shipment waybill box
Environmental Conditions	
Operation	5 ~ 40°C(41-104°F), Humidity: 25 ~ 85% non-condensing
Storage environment	-40 ~ 60°C(-40-140°F), Humidity:10 ~ 90% non-condensing

www.x-printer.gr

