



Xprinter®

XP-D461B

Thermal Barcode Printer




Thermal Barcode Printer

XP-D461B



- 8MB flash memory, 8MB SDRAM
- Support single sheet printing
- 152 mm(6")/s printing speed
- It can intelligently adjust the temperature during continuous printing

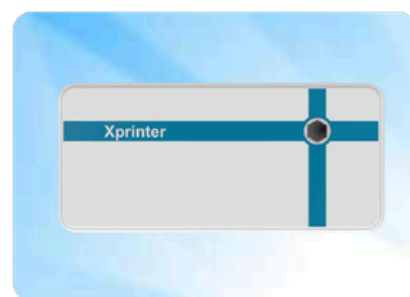

Model	XP-D461B
Resolution	203 DPI
Printing method	Direct Thermal
Print speed	152mm (6 ") / s
Max.print width	108mm (4.25")
Max.print length	1778 mm (70")
Media	
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	26 mm ~ 116 mm
Media thickness	0.06 mm ~0.20 mm
Label length	10 ~ 1778 mm
Gap height	≤2mm
Black mark height	≤2mm
Performance Features	
Processor	32-bit CPU
Memory	8MB Flash Memory / 8MB SDRAM
Interface	USB (Optional:WIFI/Bluetooth / Cloud WIFI)
Sensors	• Gap sensor • Cover opening sensor • Black mark sensor • Paper exit sensor
Fonts / Graphics / Symbologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software
1D barcode	Code 39, Code 93, Code 128UCC, Code 128 , subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST
2D barcode	PDF-417, Maxicode, DataMatrix, QR code
Rotation	0° / 90° / 180° / 270°
Emulation	TSPL / EPL / ZPL / DPL
Physical Features	
Dimension	185 mm (D) x 85 mm (W) x 85 mm (H)
Weight	706 g
Print head life	30 km
Software	
Driver	Windows / Linux / Mac
SDK	Windows / Android / iOS
Power supply	
Input	AC 100-240V, 50-60Hz
Output	DC 24V, 2.5A
Options	
Factory Options	① WIFI ② Bluetooth ③ Cloud WIFI
Dealer Options	External paper roll holder
Environmental Conditions	
Operation	5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing
Storage environment	-40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing